


BT 100 Product Manual

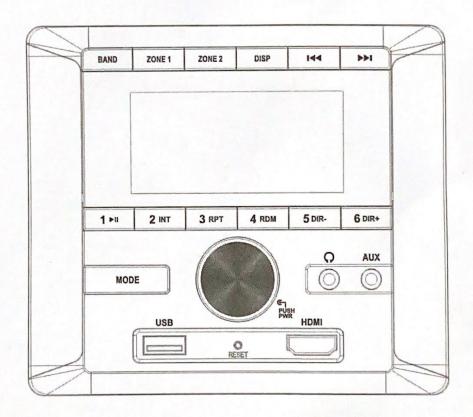


Please read the instruction carefully before operating the unit.

ATTENTIONS OF INSTALLATION

- 1. Please read the instruction manual carefully before installing the unit
- 2. Make sure to connect other wires before power on the unit.
- 3. To avoid short circuit. Please make sure all the exposed wires are insulated.
- Please fix all the wires after installation.
- Please make connection to the player accordingly to this instruction manual. Wrong connection may cause damage to the unit.
- 6. This player only fit for 12V DC device

INSTALL THE UNIT

Mounting

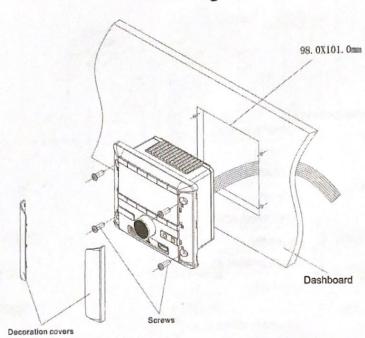

REMOVE THE UNIT


- Remove the unit
- Take out the outer trim frame. 2.

HDMI attention:

Please use good quality HDMI cable The overall length (front and rear) should not over 12 feet


WIRING CONNECTION

WIRING CONNECTION

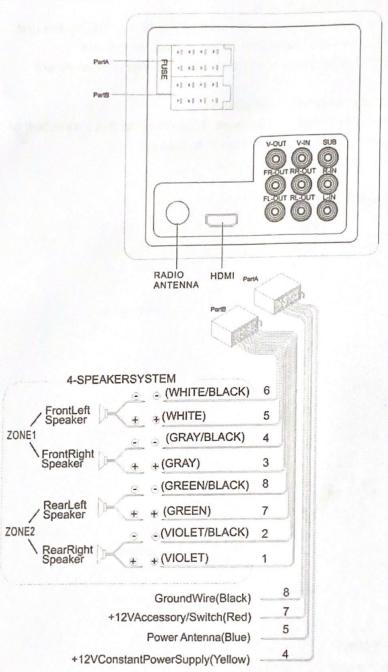

- 1. This player can only be used by the 12V DC.
- 2. Don't connect to the battery until the player is absolutely well connected.
- 3. Please make sure to connect the yellow wire to the positive of the battery(+).
- 4. When change the fuse. Please make sure the specifications are same.
- 5. Using good quality speaker with 4-8 ohm can result in the best effect of the equipment.

LOCATION OF KEYS

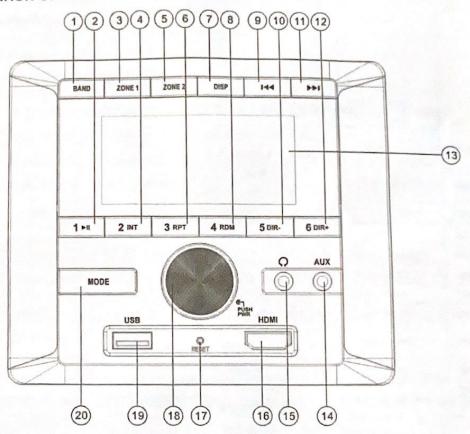

1. BAND.

2.1 №1.

3. ZONE1.

4. 2 INT.

- 5. ZONE2.
- 6.3 PRT.

7. DISP.

- 8.4 RDM.
- 9. 144.

- 10. 5 DIR-.
- 11. ₩.

12. 6 DIR+

- 13. LCD DISPLAY.
- 14. AUX JACK.
- 15. EARPHONE.

- 16. HDMI PORT.
- 17. RESET.
- 18. ROTARY KNOB.

- 19. USB PORT.
- 20. MODE.

KEY	FIII	NCT	TIOI	NS:
KEY	rui			A 00 1

KEYS	ACTIO N	RADIO	USB	AUX IN 1/2	BT MUSIC
MODE	Short	change source	change source/search:7	change source	change source
	Long	BT off/link	BT off/link	BT off/link	BT off/link
	Short	Band change	Song search	1	/
BAND	Long	Auto Store	1	1	/
DISP	Short	clock	Show ID3 info/Show play time/search:0	clock	clock
	Long	clock setting	1' st: clock 2' nd:clock setting	clock setting	clock setting
ZONE 1	Short	zone 1 on/off	zone 1 on/off	zone 1 on/off	zone 1 on/off
cond 1	Long	/	/	/	1
	Short	zone 2 on/off	zone 2 on/off	zone 2 on/off	zone 2 on/off
ZONE 2	Long	/	/	/	1
	Short	seek up	next file/search:9	/	next file
>>	Long	turn up	fast forward	/	fast forward
<<	Short	seek down	previous file/search:8	1	previous file
Long	Long	turn down	fast reverse	1	fast reverse
VOL	Rotar	volume up/down	volume up/down /search:0-9999	volume up/down	volume up/down
SEL/P OWER (PUSH	Short	power on/BAS-TRE- BAL-EQ-BEEP-DX-ST	power on/BAS-TRE- BA-EQ-BEEP-DX-ST/ search: enter	power on/BAS-TRE- BAL-EQ-BEEP-DX-ST	power on/BAS-TRE- BAL-EQ- BEEP- DX-S
VOL)	Long	power off	power off	power off	power off
1/PAU	Short	Recall M1 station.	play/pause/ search:1	/	/
	Long	save station to M1	/	1	/
O /The	Short	Recall M2 station.	INT ON/OFF/search:2	/	1
2/INT	Long	save station to M2	/	/	1
3/RPT	Short	Recall M3 station.	RPT (ONE/FLOD/ALL) /search:3	/	/
	Long	save station to M3	/	/	1
4/RDM	Short	Recall M4 station.	RDM ON/OFF/search:4	/	/
	Long	save station to M4	1	/	/
5/DIR	Short	Recall M5 station.	DIR-/search:5	/	/
-	Long	save station to M5	-10	1	1
6/DIR	Short	Recall M6 station.	DIR+/search:6	/	/
+	Long	save station to M6	+10	/	1

Common operation:

Turn on/off the unit

Press ① button (VOL knob) to turn on the unit. When the unit is switched On, press and hold POWER button for 2 seconds to switch off the unit.

Sound and setting adjustment

Press VOL knob into the setting menu as below:
BASS-TRE-BAL- ALARM (on/off)-ALARM SET-EQ -BEEP-DX-ST-BT (off/link)

Zone1 and Zone 2 operation

Press Zone 1 once to active or mute

Press Zone 2 once to active or mute

To adjust Zone 1 and 2 volume together	To adjust volume of Zone 1	To adjust volume of Zone 2
Turn the VOLUME knob to	Mute Zone 2; Then adjust the volume control	Mute Zone 1; Then adjust the volume control

When both zone 1 and zone 2 are in mute status, turn the VOLUME knob is not able to adjust the Zone 1 and Zone 2 volume.

Clock operation

In RADIO/AUX 1(2) /BT MUSIC mode. Press **DISP** button to show the time.

In USB mode. Press and hold **DISP** button to show the time. Press and hold **DISP** button again to set the clock.

Clock setting

In RADIO/AUX 1(2) /BT MUSIC mode. Press and hold **DISP** button the HH will be flashing. Rotating VOL knob to set the hour. Press **DISP** button the MM will be flashing. Rotating VOL knob to set the minute. Then press **DISP** button to exit.

Head phone operation

There is a 3.5mm head phone jack in the front panel. It is following the zone 1's operation.

Radio Operation

Receive a radio station

Press MODE button to select radio mode. Then press BAND button to select desired band. Shortly press >> / Idd button to receive the desired radio station. Press and hold >> / Idd button for manual tuning the frequency.

Manually store station & recall preset station

Receiving a desired station. Press and hold one of the preset button (1~6) for 2 seconds. The current station is stored into the number button. Shortly press the preset button (1~6) to directly listen the station that saved in the corresponding preset button.

Auto store station

Press and hold BAND button for 2 seconds to auto store stations to numeric buttons 1-6 of

band 1-3.

USB Operation

When an USB driver inserted to the unit, the unit will play the MP3/WMA file automatically. If an USB drive is already inserted in the unit. Keep pressing MODE button shortly until the USB mode display appears.

Select file

Press button to skip to next/previous file. Hold button to fast forward or fast reverse.

Play/Pause

Press 1/ ▶ button to pause/playing the file.

INTRO playing

Press 2/INT button to play first 10 seconds of each file. Press again to stop this function.

Repeat function

Press 3/RPT button to select RPT mode. RPT FOLD: Repeat all files of the folder.

RPT ONE: Repeat the same file.

RPT ALL: Repeat all files.

RANDOM

Press 4/RDM button to choose RDM on/off. RDM on: Playing all files in random order. RDM off: Turn off the random function.

Directory+/- function

Press DIR+/DIR- button to select next/previous folder to play.

Search song

Press **BAND** button. It shows NUM 0000. Rotating VOL (or directly enter number) to select the numbers then press VOL to play. Please note the 7/8/9/0 as: MODE=7, ◄◄=8, ▶▶ =9, DISP=0.

AUX IN 1/2 operation

AUX IN 1 for front panel 3.5mm jack. AUX IN 2 for RCA in back of the unit. Pressing MODE button to switch to AUX IN1(2) mode when Connecting the audio signal to the unit.

Bluetooth Operation

Pairing

On mobile phone, select the Bluetooth item searching the Bluetooth device. "BT 100" should appear in the list, select "BT 100" and then input password "0000" If it needs a password. When successful paired, the BT mark will be displayed on LCD.

Bluetooth Audio

Press MODE button to switch to BT MUSIC mode. It will play a song of your mobile phone automatically. Press III key to pause/play the song. Press III button to select next/previous song.

Disconnect the Bluetooth

When the mobile phone paired with the unit. Press and hold MODE button to disconnect the Bluetooth. Press and hold MODE button again to connect the Bluetooth again.

BT APP operation

1. APP installation

Alternative way to control the unit instead of using the front panel, you can use your smart phone. You will need to install the "BT 100" app onto your smart phone. The APP can be downloaded from Google Play (Android phone) or App Store (iPhone). Search for "BT 100" and proceed to download. Install per the app instructions.

- 2. Open the BT function of your smart phone and pair with the "BT 100" unit.
- 3. Under BT connection, connect with "BT 100" icon to enter the APP connection interface


Note: 1) Your smart phone must be Bluetooth version 4.0 or above.


2) Before turn on the APP, make sure the unit didn't pair with another device

RADIO mode

Auto store station: In FM band clicking C button to auto store stations (up to 18 pcs stations). In AM band clicking C button to auto store stations (up to 12 pcs stations).

Manually store station: Receiving a desired station. Press and hold one of the preset station (1~18) for 2 seconds. The current station is stored into the number. Shortly press the preset station (1~18) to directly listen to this station.

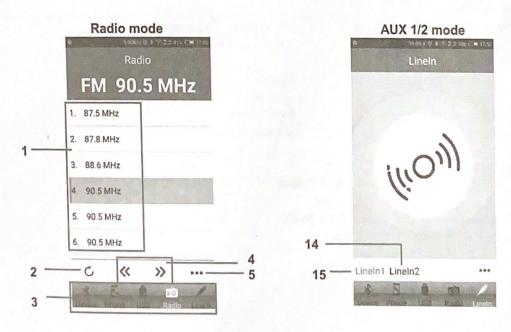



03:44
04:49
04:00
05:54
03:45
04:16
•••

1:	preset station
4:	Seek up/down button
7:	Zone 1 MUTE
10:	refresh button
	RPT/RDM button
	pause/play button

2: Auto store button 5: Sub menu 8: Zone 2 MUTE 11: Zone 1 VOL. 14: change to AUX 2 mode 15: change to AUX 1 mode

3: source change 6: Back to previous folder 9: EQ setting 12: Zone 2 VOL.

GENERAL

Power Supply Requirements Chassis Dimensions Tone Controls

- Bass (at 100 Hz) Treble (at 10 kHz) Maximum Output Power Current Drain

: DC 12 Volts, Negative Ground

16 ---

: 129(W) x 112(D) x 65(H)

: ±10 dB : ±10 dB : 4 x 40 watts : 10 Ampere (max.)

RADIO

Frequency Coverage IF Sensitivity Stereo Separation

FM

87.5 to 108 MHz 10.7 MHz 4μV(S/N=30dB) >25dB

AM

520 to 1710 kHz 450 KHz 36dBuV(S/N=20dB)

TROUBLE SHOOTING

Symptom	Cause	Solution
No power.	The car ignition switch is not on.	If the power supply is connected to the car accessory circuits, but the engine is not moving, switch the ignition key to "ACC".
	The fuse is blown.	Replace the fuse.
	Volume is in minimum	Adjust volume to a desired level.
No sound.	Wiring is not properly connected.	Check wiring connection.
The operation keys do not	The built-in microcomputer is not operating properly due to noise.	
The radio does	The antenna cable is not connected.	Insert the antenna cable firmly.
not Work. The radio station automatic selection does not work.	The signals are too weak.	Select a station manually.
APP play phone music sound can't send to unit.	Unit paired with another mobile phone.	 Turn off the Bluetooth function of another mobile. 2) Exit APP and turn on APP again.